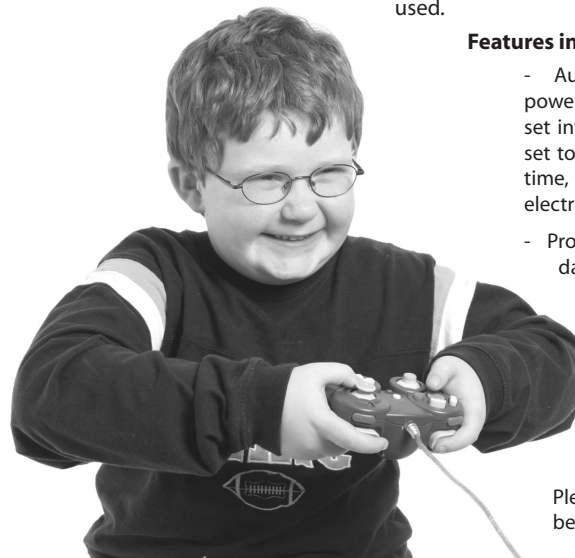


POWER COP



US PATENT PENDING 10-903962

POWER COP



Thank you for purchasing the Power Cop electronic device timer. The Power Cop is a locking, programmable external timer that allows you to control the amount of time that an electronic device can be used.

Features include:

- Automatic or manual operation. The power cop can be programmed to allow for set intervals of usage. The unit can also be set to "unrestricted" to enable usage at any time, or "off" to totally disable usage of an electronic device.
- Program a different usage time for each day of the week.
- Minimum schedule interval of 15 minutes.
- Internal battery supply saves the timer schedule, so power outages will not disrupt the programming.

Please read the entire instruction booklet before operating your Power Cop.

Safety Instructions

2

To prevent fire or shock hazard do not use this plug with an extension cord, receptacle or other outlet unless the blades can be fully inserted to prevent blade exposure. To prevent fire or shock hazard, do not expose this appliance to rain or moisture.





 <p>The lightning flash with an arrowhead symbol within the equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be sufficient magnitude to cause an electronic shock.</p>	<p>WARNING RISK OF ELECTRONIC SHOCK DO NOT OPEN</p> <p>WARNING: To reduce the risk of electronic shock, do not remove cover (or back). No user-serviceable parts inside. Refer servicing to qualified service personnel.</p>	 <p>The exclamation point within the equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in this owner's manual.</p>
<p>SEE MARKING ON BOTTOM / BACK OF PRODUCT</p>		

Important Safety Instructions

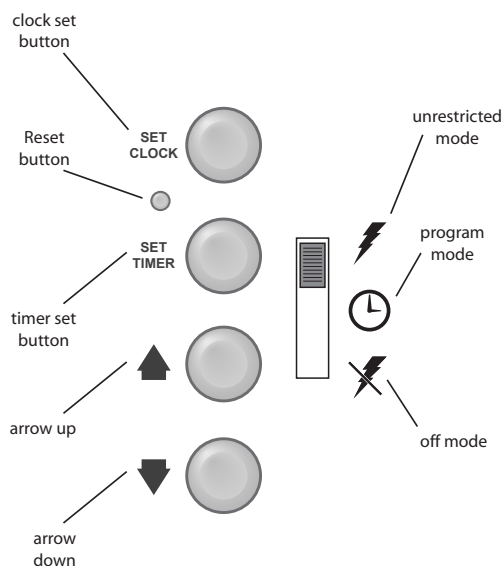
- 1) Read these instructions.
- 2) Follow all warnings
- 3) Follow all instructions
- 4) Do not use this apparatus near water.
- 5) Clean only with a dry cloth
- 6) Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- 7) Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus that produce heat.
- 8) Do not defeat the safety purpose of the polarized or ground-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- 9) Protect the power cord from being walked on or pinch particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- 10) Only use attachments/accessories specified by the manufacturer.
- 11) Unplug this apparatus during lightening storms or when unused for long period of time.
- 12) Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been exposed to rain or moisture, does not operate normally.

Locking Your Power Cop

3

- 1  Insert the key in the keyhole and turn 90° to unlock the Power Cop
- 2  Lift the Power Cop lid to reveal the outlet and function buttons.
- 3  Plug the chosen electronic device into the Power Cop. Make sure that the Power Cop is unplugged first.
- 4  Plug the Power Cop into a wall outlet or surge protector, and program it (program instructions on page 5). Lock unit when programming is completed

NOTE: The Power Cop should be allowed to charge for 12 hours before first usage.



Power Cop Modes

Position the mode switch to change the program access mode.

⚡ Unrestricted Mode

In unrestricted mode, the Power Cop is providing a constant supply of power to plugged in device. In this state, the Power Cop does not monitor or restrict access to this device.

🕒 Program Mode

The program mode of the Power Cop allows users to restrict access to electronic devices according to the programmed time schedule. The Power Cop must also be in the program mode to set this time schedule.

⚡ OFF Mode

In the OFF mode, the Power Cop does not supply power to the plugged in device.

Set System Clock

NOTE: The Power Cop must be in "program" mode to set the system clock.

NOTE: The Power Cop should be allowed to charge for 12 hours before first usage.

- 1) Press and hold the "SET CLOCK" button. The hour increment on the screen will flash.
- 2) Press the ▼ and ▲ buttons to select the hour.
- 3) Press the "SET CLOCK" button. The minute increment on the screen will flash.
- 4) Press the ▼ and ▲ buttons to select the minute.
- 5) Press the "SET CLOCK" button. The day of the week will flash on the screen.
- 6) Press the ▼ and ▲ buttons to select the day of the week.
- 7) Press the "SET CLOCK" button again to set the clock. The timer can now be set.

Program the Timer Schedule

NOTE: Make sure that the Power Cop is in the "program" mode before you begin to set the timer.

- 1) Press and hold the "SET TIMER" button. The screen will show the set number of time and the day of the week will be flashing.

NOTE: Saturday and Sunday are preset to 2 hours/day. Monday through Friday are preset to 1 hours/day.

- 2) Press the ▼ and ▲ buttons to adjust the day of the week.
- 3) Press the "SET TIMER" button and the hours will be flashing.
- 4) Press the ▼ and ▲ buttons to adjust the hour.
- 5) Press the "SET TIMER" button and the minutes will be flashing.
- 6) Press the ▼ and ▲ buttons to adjust the minutes.

Once all seven days have been programmed, you have completed the timer schedule. The screen will show the Timer icon and time remaining unless you change the timer mode.

NOTE: The timer schedule can be reset to the default timer settings by depressing and holding the reset button for 10 seconds.

Power Cop Timer Alarms

Your Power Cop device has been programmed to provide audible and visual alarms as a programmed time schedule is nearing its end.

Time Remaining	Timer Alarm
10 Minutes	The Power Cop unit will beep once. A red light will begin to flash on the unit, indicating that the timer schedule is nearing its end.
5 Minutes	The Power Cop unit will beep four times. The red timer light will continue to flash.
1 Minute	The Power Cop unit will beep eight times. The red timer light will continue to flash.
5 Seconds	The Power Cop unit will beep ten times. The red timer light will continue to flash.
No Time Remaining	When the timer schedule has ended the red timer light will stop flashing and become fully illuminated. This fully illuminated light indicates that there is no more time left on that day's schedule.

NOTE: Whenever there is time remaining on that day's timer schedule, a blue light will be illuminated on the Power Cop unit.

FULL 90 DAY WARRANTY

If within 90 days from the date of purchase, this product fails due to a defect in material or workmanship, Enterprise Management Services LLC C/O Northwest Direct, Inc. will repair or replace it, at its sole option, free of charge. This warranty is extended to the original household purchaser only and is not transferable. This warranty does not apply to: (a) damage to units caused by accident, dropping or abuse in handling, acts of God or any negligent use; (b) units which have been subject to unauthorized repair, opened, taken apart or otherwise modified; (c) units not used in accordance with instructions; (d) damages exceeding the cost of the product; (e) LED's and batteries; (f) the finish on any portion of the product, such as surface and/or weathering, as this is considered normal wear and tear; (g) transit damage, initial installation costs, removal costs, or reinstallation costs.

EMS POWER COP, ENTERPRISE MANAGEMENT SERVICES LLC WILL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS IN LIEU OF ALL OTHER EXPRESS OR IMPLIED WARRANTIES. ALL IMPLIED WARRANTIES, INCLUDING THE WARRANTY OF MERCHANTABILITY AND THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, ARE HEREBY MODIFIED TO EXIST ONLY AS CONTAINED IN THIS LIMITED WARRANTY, AND SHALL EXIST ONLY AS CONTAINED IN THE LIMITED WARRANTY, AND SHALL BE OF THE SAME DURATION AS THE WARRANTY PERIOD STATED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON THE DURATION OF AN IMPLIED WARRANTY, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state. Warranty service is available by mailing postage prepaid to:
Standard Merit USA LLC / After Sales Service / 6330 So. Sandhill Rd. Suite 2/ Las Vegas, Nevada, United States 89120 / support@mmpsusa.com / Please be sure to include proof of purchase and wrap the product securely to avoid shipping damage.

MADE IN CHINA
www.mmpsusa.com